

3400-3600 MHz 14° H-POL or V-POL
Model:PB3500-20-14C
Electrical Data




Frequency:	3400-3600 MHZ
Gain:	20 dBi
VSWR:	<1.5:1
Polarization:	Horizontal or Vertical
Horizontal Beamwidth :	14°
Vertical Beamwidth:	14°
Nominal Impedance:	50 Ohms
F/B Ratio:	>25 dB
Max Input Power:	100 W
Lightning Protection:	DC Ground

Mechanical Data

Connector :	N Female
Dimensions:	300*300*45mm
length*width*height	/11.8*11.8*1.8in
Weight:	1.4kg/3.0lb
Radome Material:	Weatherproof ABS
Mounting Method:	Mast
Mast Size:	Ø30-Ø50mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C

Shipment Data

Packing Qty:	10pcs/Carton
Carton Size:	650*350*350mm
(length*width*height)	/20.9*12.6*12.6in
Packing Weight:	14.2kg/31.3lb

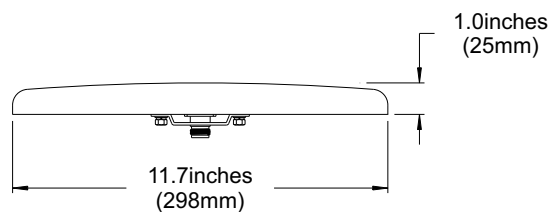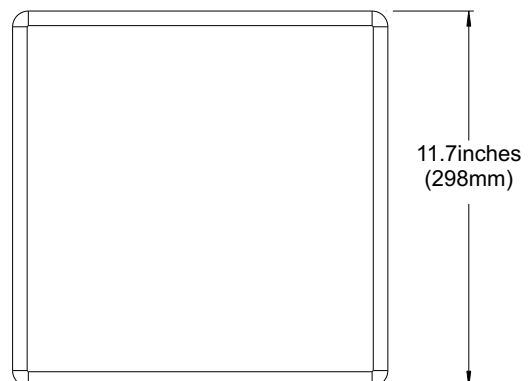

Installation Guide

Model:PB3500-20-14C

