

698-2700 MHz VV- POL
Model:QB627-3V-2N
Electrical Data



Frequency (MHz):	698-960	1710-2170	2300-2700
Gain (dBi):	3.8	4.2	5.3
VSWR:	<2.5:1	<2.0:1	<2.0:1
Polarization:	Vertical and Vertical		
Horizontal Beamwidth :	360°		
Vertical Beamwidth:	68°	62°	55°
Isolation:	>28dB		
Nominal Impedance:	50 Ohms		
Max Input Power:	100 W		
Lightning Protection:	DC Ground		

Mechanical Data

Connector :	2*N Female
Dimensions:	Ø80*400mm
(diameter*length)	Ø3.1*15.7in
Weight:	1kg/2.2lb
Cable Length:	2*180mm / 2*7.1in
Radome Material:	UV Resistance PVC
Mounting Method:	Mast
Mast Size:	Ø40-Ø60mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C

Shipment Data

Packing Qty:	10pcs/Carton
Carton Size:	540*480*210mm
(length*width*height)	21.3*18.9*8.3in
Packing Weight:	11kg/24.2lb

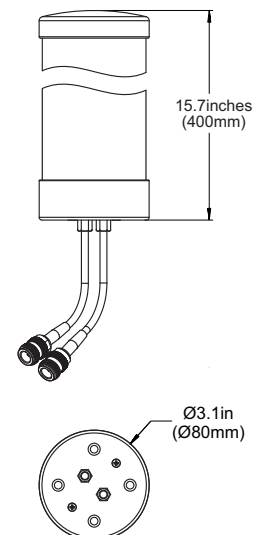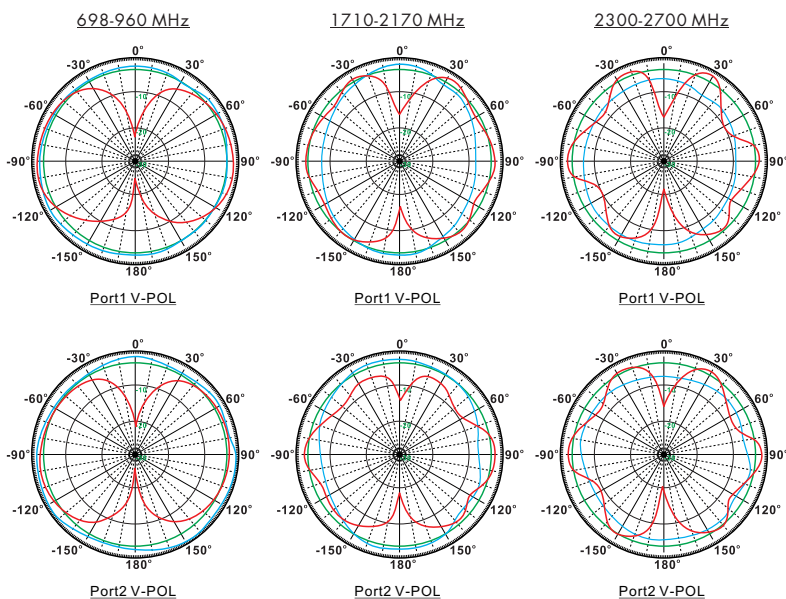

Installation Guide

Model:QB627-3V-2N

